


Center for Irrigation Technology

DRTS MINORO 4L "SINGLE GRIT" TEST

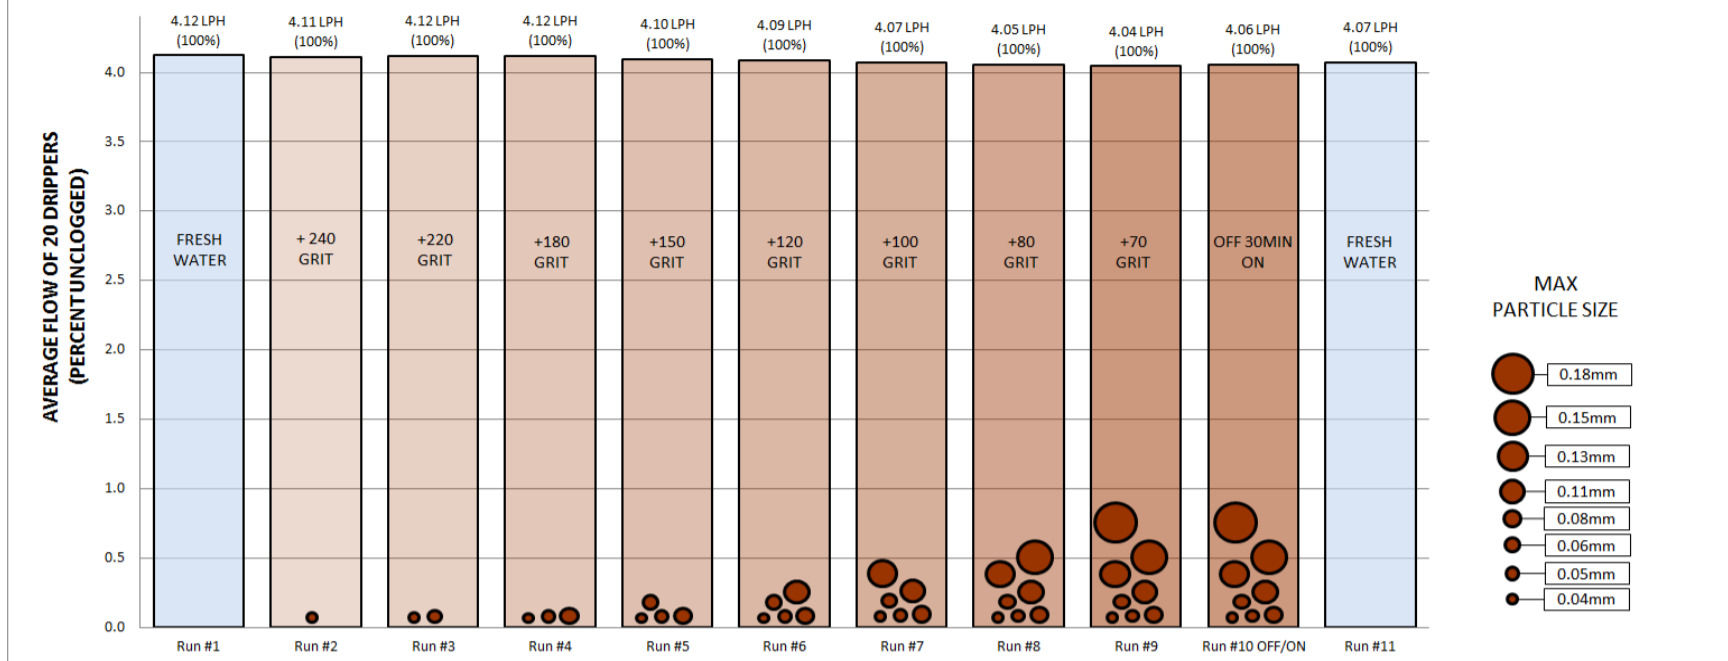

Date: 24-Oct Test # 1 Technician(s): Paul
 Pressure: 1 bar Grit Concentration: 250 ppm/grit Supervisor: Joe
 EMITTER FLOW RATE IN LPH Velocity: 0.9 m/sec. Title: 16MM Minoro 1L

| Date: | 24-Oct | 24-Oct | 24-Oct | 24-Oct | 24-Oct | 24-Oct | 24-Oct | 24-Oct | 24-Oct | 24-Oct | 24-Oct |
|---------------|----------------------------|-----------------------|-------------------------|------------------------------|-----------------------------------|--|---|---|---|--------------------|-------------------------|
| Temp. °C | 20.2 | 21.1 | 22.1 | 22.3 | 22.9 | 24.2 | 25.1 | 25.5 | 26.3 | 24.0 | 23.1 |
| Emitter # | Run #1 Filtered Water Only | Run #2 water +240 (2) | Run #3 water +240 & 220 | Run #4 water +240, 220 & 180 | Run #5 water +240, 220, 180 & 150 | Run #6 water +240, 220, 180, 150 & 120 | Run #7 water +240, 220, 180, 150, 120 & 100 | Run #8 water +240, 220, 180, 150, 120, 100 & 80 | Run #9 water +240, 220, 180, 150, 120, 100, 80 & 70 | Run #10 OFF/ON (3) | Run #11 Fresh water (4) |
| 1 | 3.90 | 3.96 | 3.96 | 4.08 | 4.08 | 4.08 | 4.02 | 4.02 | 3.96 | 3.84 | 3.90 |
| 2 | 4.08 | 3.96 | 4.02 | 4.02 | 4.02 | 4.02 | 4.02 | 3.96 | 4.02 | 4.02 | 4.08 |
| 3 | 4.20 | 4.14 | 4.20 | 4.14 | 4.14 | 4.08 | 4.02 | 4.02 | 4.08 | 4.14 | 4.20 |
| 4 | 4.08 | 4.08 | 4.08 | 4.08 | 4.14 | 4.08 | 4.08 | 4.02 | 3.96 | 3.96 | 3.96 |
| 5 | 4.20 | 4.14 | 4.20 | 4.08 | 4.08 | 4.02 | 4.08 | 4.08 | 4.14 | 4.08 | 4.02 |
| 6 | 4.08 | 4.14 | 4.20 | 4.20 | 4.14 | 4.20 | 4.08 | 4.08 | 4.08 | 4.14 | 4.20 |
| 7 | 4.08 | 4.08 | 4.08 | 4.14 | 4.20 | 4.14 | 4.08 | 4.08 | 4.14 | 4.14 | 4.14 |
| 8 | 4.08 | 4.02 | 4.08 | 4.08 | 4.08 | 4.02 | 4.08 | 4.02 | 4.02 | 4.02 | 3.96 |
| 9 | 4.32 | 4.26 | 4.20 | 4.26 | 4.20 | 4.20 | 4.26 | 4.20 | 4.14 | 4.14 | 4.08 |
| 10 | 4.14 | 4.08 | 4.14 | 4.14 | 4.08 | 4.14 | 4.08 | 4.08 | 4.14 | 4.20 | 4.20 |
| 11 | 4.20 | 4.14 | 4.14 | 4.14 | 4.14 | 4.08 | 4.08 | 4.08 | 4.08 | 4.08 | 4.14 |
| 12 | 4.26 | 4.26 | 4.20 | 4.20 | 4.14 | 4.20 | 4.08 | 4.08 | 4.08 | 4.14 | 4.14 |
| 13 | 4.02 | 4.02 | 4.02 | 3.96 | 3.90 | 3.90 | 3.90 | 3.96 | 3.96 | 3.96 | 4.02 |
| 14 | 4.02 | 4.02 | 4.08 | 4.08 | 4.08 | 4.08 | 4.02 | 4.02 | 4.02 | 4.08 | 4.08 |
| 15 | 4.08 | 4.08 | 4.14 | 4.08 | 4.02 | 4.08 | 4.02 | 3.96 | 3.96 | 4.08 | 4.08 |
| 16 | 4.14 | 4.14 | 4.14 | 4.14 | 4.08 | 4.08 | 4.14 | 4.20 | 4.08 | 4.02 | 3.96 |
| 17 | 4.08 | 4.08 | 4.08 | 4.08 | 4.08 | 4.02 | 4.08 | 4.02 | 3.96 | 4.02 | 4.08 |
| 18 | 4.08 | 4.14 | 4.08 | 4.14 | 4.14 | 4.08 | 4.08 | 4.08 | 3.96 | 3.96 | 3.96 |
| 19 | 4.20 | 4.20 | 4.14 | 4.14 | 4.08 | 4.14 | 4.14 | 4.14 | 4.08 | 4.02 | 4.02 |
| 20 | 4.20 | 4.20 | 4.20 | 4.14 | 4.08 | 4.08 | 4.02 | 3.96 | 4.02 | 4.14 | 4.20 |
| AVG | 4.12 | 4.11 | 4.12 | 4.12 | 4.10 | 4.09 | 4.07 | 4.05 | 4.04 | 4.06 | 4.07 |
| SD | 0.10 | 0.09 | 0.07 | 0.07 | 0.07 | 0.07 | 0.07 | 0.07 | 0.07 | 0.09 | 0.09 |
| CV(5) | 2.3% | 2.1% | 1.7% | 1.6% | 1.6% | 1.8% | 1.7% | 1.8% | 1.7% | 2.2% | 2.3% |
| # Plugged (6) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

NOTES:

(1) All emitter samples provided by: **DRTS**

Test Performed by the Center for Irrigation Technology CSUF, Fresno, CA. to standard plugging protocol. Copies of test protocol available on request.

Emitter specification:

(2) Materials added are Aluminum Oxide Grits as manufactured by Fusco Abrasive Systems, Inc. Compton, California to ANSI B 74.12-1992 Standards

(3) System shut down for 30 minutes, then restarted and measured.

(4) System completely flushed, added 200 mesh screen, and measured.

(5) CV in the context of this report is used for statistic clarification and not meant to represent coefficient of manufacturing variability

(6) Flow less than 1.0 ml / minute

The Center for Irrigation Technology (CIT) at California State University, Fresno is the only independent laboratory in the United States specializing in testing and evaluating irrigation products. CIT has two test protocols for determining dripper sensitivity to clogging. The Single Grit and the Double Grit tests were used to develop the DRTS Minoro dripper. The Single Grit test is typically used to recommend filter mesh sizes for irrigation systems and the Double Grit test is used by the mining industry for extreme clogging applications.

The Single Grit test developed in 1998 is the standard plugging test for irrigation emitters and is administered as follows:

| "Single Grit" Test | | |
|---------------------------|--------------------------|-----------|
| Grit No. | Max Particle Size | |
| | inches | mm |
| 240 | 0.0018 | 0.045 |
| 220 | 0.0021 | 0.053 |
| 180 | 0.0025 | 0.063 |
| 150 | 0.0030 | 0.075 |
| 120 | 0.0042 | 0.106 |
| 100 | 0.0049 | 0.125 |
| 90 | 0.0059 | 0.150 |
| 80 | 0.0071 | 0.180 |
| 70 | 0.0083 | 0.212 |

Flow rates are measured with clean water using a graduated cylinder and a stop watch. The system has a fine mesh screen on this run to insure that the water is clean. During the test the screen is changed as required to pass all of the introduced grit materials. While the system is running grit no. 240 is added and the emitter flow rates are remeasured. This process is repeated adding ever coarser grits until grit no. 70 is added. The system is then shut down for 30 minutes and restarted. The system is then purged of all grits, the fine mesh filter re-installed, and the system filled with fresh water. The system is repressurized, and the emitter flow rates measured which concludes the test.