




# Accumulator

*Model ACCU-32*

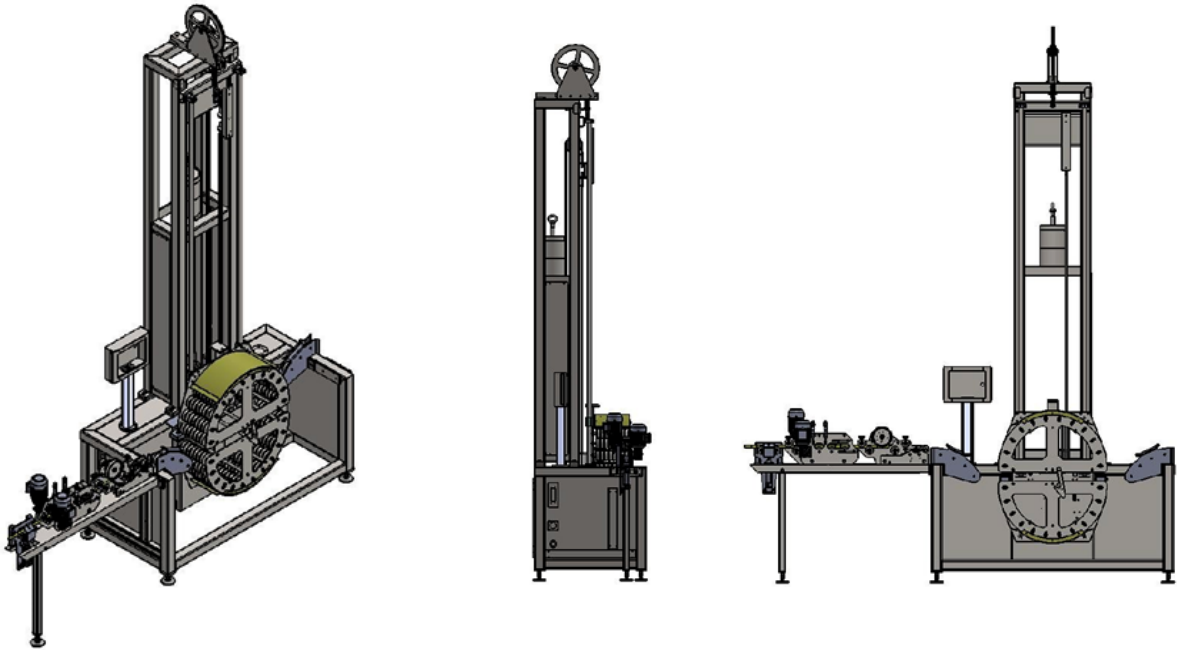

The DRTS accumulator is designed to provide a time buffer during the pipe production useful when beginning a new coil. Accumulation is vertical to minimize floor space. The upper rollers move vertically while the bottom rollers are fixed. All rollers are idle (non-driven) and are designed specifically for drip pipe of varying diameters. The accumulator is automatically synchronized to the production line.

## Specification

- **Pipe diameter range:** 12-25mm
- **Control System:** PLC
- **HMI:** 7" Siemens
- **No. of pipe driving motors:** 2 pcs
- **Motor KW:** 0.25
- **Pipe Cutting:** Pneumatic
- **Height:** 4 Meters
- **Working Concept:** Counter Weight
- **Allows increased line speed (Up to 85 MPM)**
- **Designed to work with Semi-Auto Coilers**
- **Allows additional change time**
- **Ensures no pipe will touch the floor or get tangled.**
- **Allows online manual visual inspection of the holes**