




Accumulator

Model ACCU-32

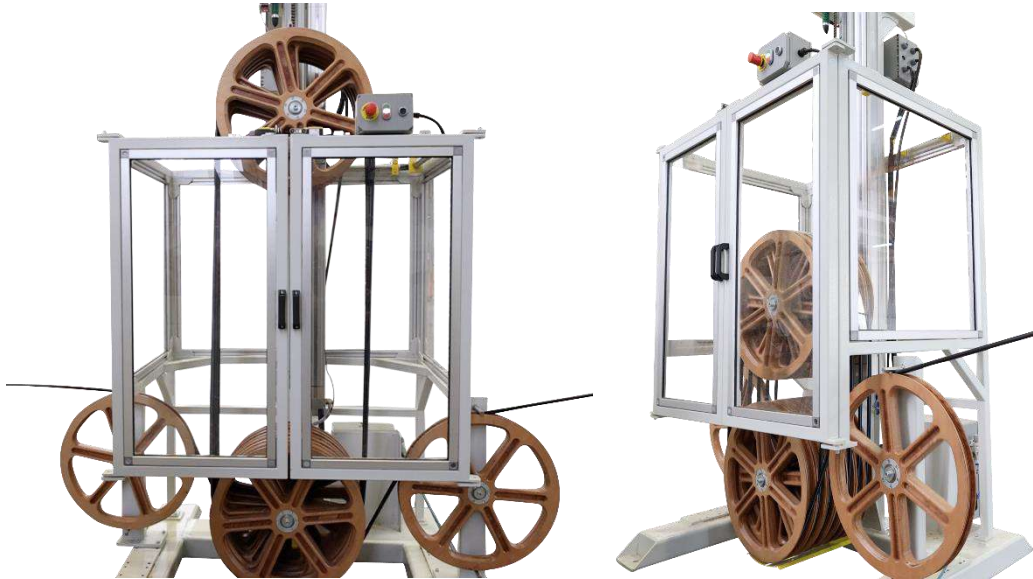

The DRTS accumulator is designed to provide a time buffer during the pipe production useful when beginning a new coil. Accumulation is vertical to minimize floor space. The upper rollers move vertically while the bottom rollers are fixed. All rollers are idle (non-driven) and are designed specifically for drip irrigation as well as plain pipe of varying diameters. The accumulator is automatically synchronized to the production line.

Specification

- **Pipe diameter range:** 12-25mm
- **Accumulation Length:** 35-40m
- **Max Level Control:** By Sensor
- **Movement System:** Pneumatic Air Cylinder
- **Synchronization:** With Coiler
- **Pipe Cutting:** Pneumatic
- **Height:** 3.5 Meters
- **Working Concept:** Counter Weight + Pneumatic Cylinder
- **Allows increased line speed (Up to 90-100 MPM)**
- **Designed to work with Semi-Auto Coilers**
- **Allows additional change time**
- **Ensures no pipe will touch the floor or get tangled.**
- **Allows online manual visual inspection for dripline dripper holes**